

PVC-ball valve type KK03



description:

3-way-ball valve with adhesive connection and lever in compact design. To shut off pipeline systems. Ideal for media like chlorine water, swimming pools.

features:

- Suitable for water treatment, swimming pools, pond building etc.
- Long life time
- Secure ball

connection:

Adhesive connection d 20, d 25, d 32, d 40, d 50, d 63
 – depending on design

pressure:

0 – 10 bar – depending on design

connection:

adhesive connection

body:

PVC-U

ball drilling:

T-drilling or L-drilling

seal:

PTFE/EPDM

lever:

PVC-U

lever colour:


Red







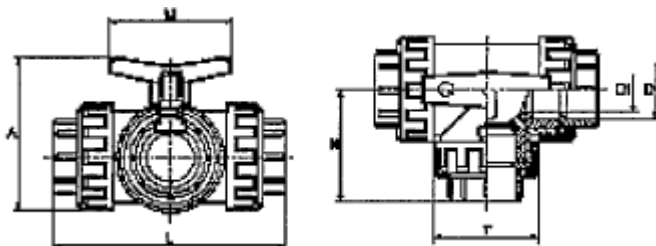

temperature:

-10 up to 60 °C

dimensions:

connection	D1	D	L	A	M	T	N
d 20	15	20	112	80	85	45	57
d 25	20	25	123	87	85	55	62
d 32	25	32	147	104	100	66	74
d 40	32	40	169	115	100	79	82
d 50	40	50	209	145	127	102	104
D 63	50	63	230	460	127	111	117



3-way-ball-valve L- and T-drilling				
T-drilling				
L-drilling				

Article number:

construction	drilling	seal	thread
KK03	00 – T-Bohrung 01 – L-Bohrung	00 – PTFE/EPDM	02 – d20 03 – d25 04 – d32 05 – d40 06 – d50 07 – d63

example No. KK03000004:

KK03 | 00 | 00 | 04

3-way-ball valve made of PVC
 connection: adhesive connection
 Seal: PTFE/EPDM
 thread: d32

Image similar, subject change without notice.