


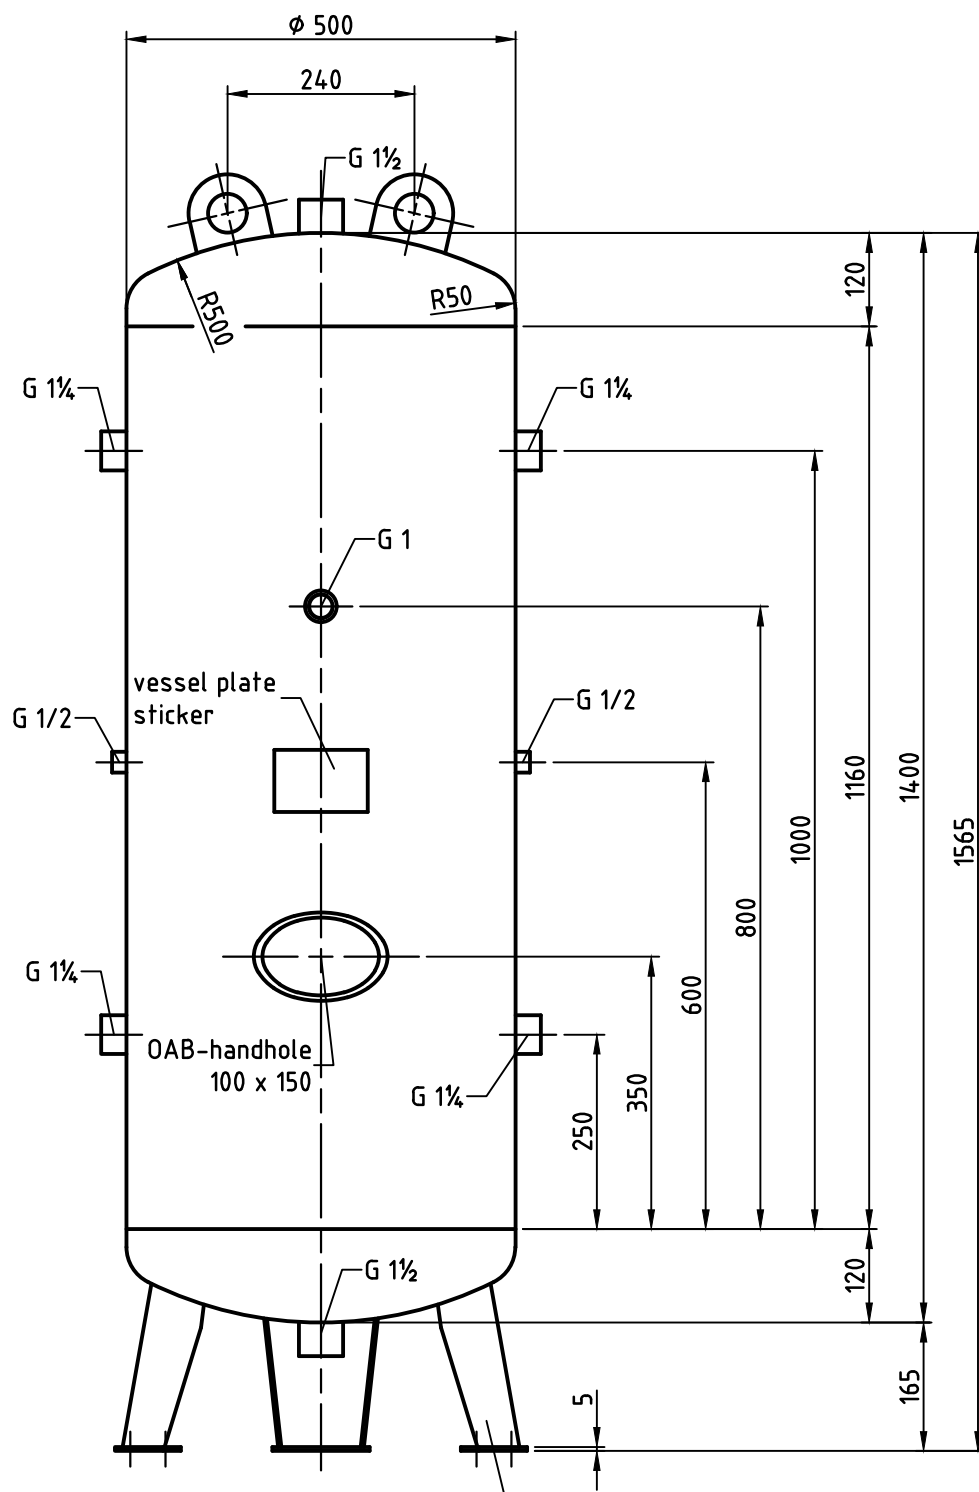
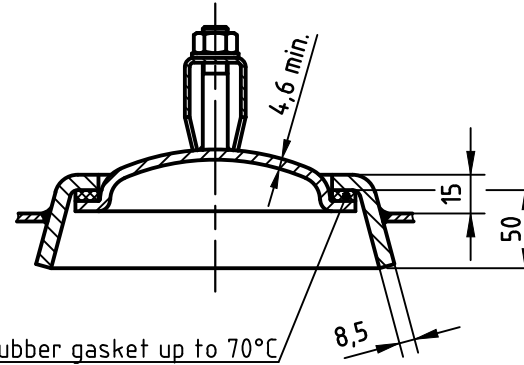


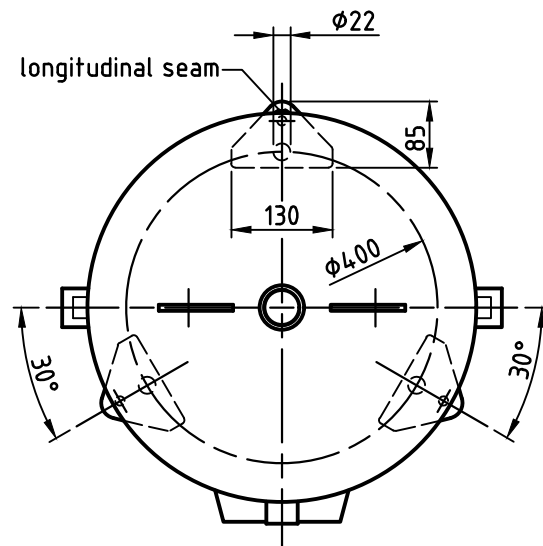


OAB 51 - handhole lock 100/150
tested components

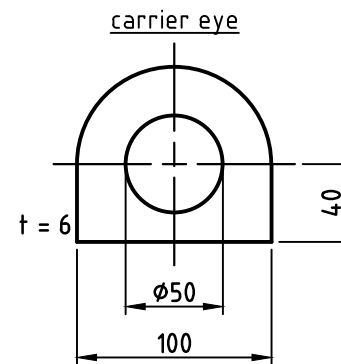

socket welding
drain and plug socket
inside flush



SEAMS (unless otherwise indicated on drawing):

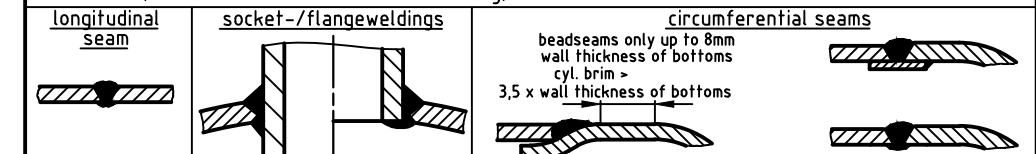

pressure variation :

pressure swing 0-16 bar max. operations 1.000

infinite operation of pressure swing within 20% of 16 bar

operational characteristics / calculation characteristics :

volume V (litre) : 250
max. working pressure PS (bar) : 16
test pressure PT (bar) : 22,88
min. working temp. TS (°C) : -20
max. working temp TS (°C) : 50
fluid : compressed air / nitrogen (fluid group 2)
location : inside and outside building possible

coating :

inside : raw
outside : primed (if customer wishes lacquered) or: inside : hot dip galvanized
outside : hot dip galvanized

manufacturing and testing

acc. to PED 2014 / 68 / EU - AD 2000

conformity benchmark :

fluid group : 2
diagram : 2
categorie : IV
module : H1

scale:	1:10				description: pressure vessel upright 250 l 16 bar			
our no.:	-							
order no.:	-							
used for:	M+B Standardvessel		date	name	drawing no.:			revision:
weight:	ca.120 kg	compl.	16.06.2015	CW				
sheet:	1	appr.	16.06.2015	SW	MB 030603-2.250/E			date of revision: 16.06.2015
of sheet:	1	follow protection mark acc. DIN 34						
date of plot:	16.06.2015				drawing no. of design inspection: MB 030603-2			revision only on CAD
file:	ENG-010725							